

Research Brief 194: Sediment Caps That Degrade Contaminants

Release Date: 2/02/2011



<http://www.niehs.nih.gov/srp/>

Background

Covering submerged contaminated sediments with layers of sand, gravel, rock, or synthetic materials (i.e., *in situ* sediment capping) stabilizes the sediment and prevents mobilization of contaminants into the water column. Capping strategies can reduce long-term ecological and human health risks at sites where dredging is cost-prohibitive and monitored natural attenuation is not a suitable remediation option.

“Amended capping” incorporates adsorbents such as activated carbon or apatite in the cap material to sequester contaminants. Recently-developed “reactive caps” integrate engineered components to stimulate abiotic or biotic degradation of contaminants. For example, iron/palladium nanoparticles can adsorb and dechlorinate the PCB 2-chlorobiphenyl, and reactive caps have been designed to promote microbial growth and biodegradation of contaminants. However, even in reactive caps, biodegradation processes are limited by the availability of electron donors or electron acceptors.

While capping isolates contaminants from the aquatic ecosystem, the process does not result in removal or detoxification of the contaminants.

With funding from the SRP, Dr. Danny Reible’s research group is exploring the concept of combining *in situ* capping with another contaminant-remediation strategy: electrode-based remediation. When electrodes are placed in contaminated groundwater or sediment, redox gradients can be established to sequester heavy metals at the electrode, collect contaminants for further treatment, or stimulate microbial growth to enhance biodegradation. However, standard electrode-based systems are costly as they require high voltage and/or a large number of electrodes.

Advances

Dr. Reible, in cooperation with co-investigators Kelvin Gregory and Greg Lowry at Carnegie Mellon University, developed an approach to place geotextiles with polarized carbon electrodes in a sediment cap. He hypothesized that by controlling the voltage through the electrodes, he could establish and control oxidation and reduction zones within the cap. Hydrogen (H_2) and oxygen produced by water electrolysis at the electrode surfaces can serve as electron acceptors and electron donors to stimulate microbial growth and create an “electrode biobarrier” that accelerates contaminant degradation. The magnitude and thickness of an electrode-stimulated biobarrier and the redox gradient could be engineered to address specific contaminants of concern on a site-by-site basis.

The researchers evaluated the potential for carbon electrodes to create and control a redox gradient in a sand cap using T-cell reactors containing sediment from the Anacostia River (Washington, DC). They placed carbon electrodes in a sand sediment cap and continuously applied a 4V electrical current. Within 3 days, the system established oxidizing conditions at the anode and reducing conditions at the cathode, as well as a gradient between the electrodes.

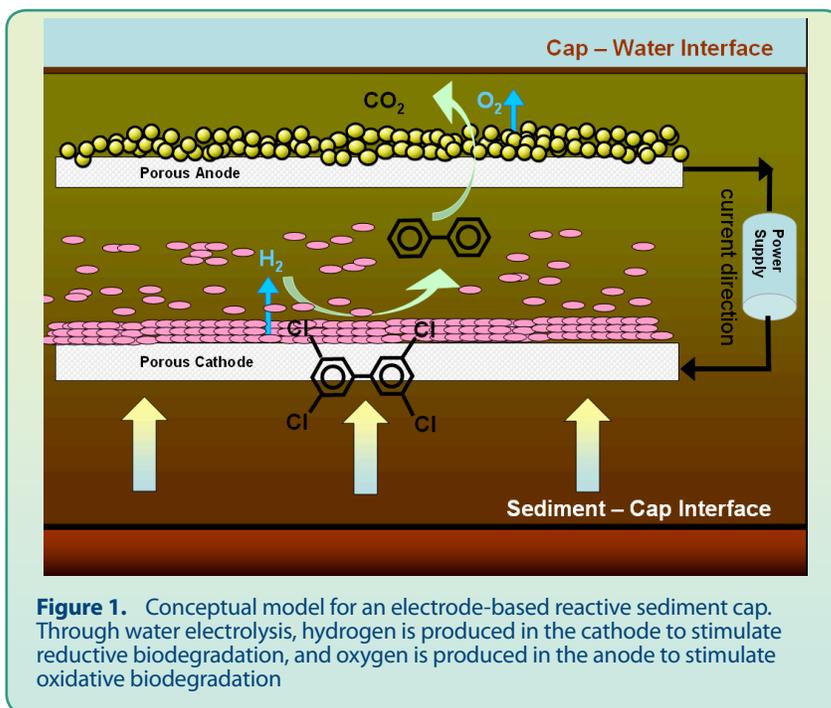


Figure 1. Conceptual model for an electrode-based reactive sediment cap. Through water electrolysis, hydrogen is produced in the cathode to stimulate reductive biodegradation, and oxygen is produced in the anode to stimulate oxidative biodegradation

The researchers examined carbon electrode-stimulated degradation of tetrachlorobenzene (TeCB) in Anacostia River sediments and found that an external potential of 4V resulted in ~90% removal of TeCB over 21 days. Similar removal was not observed in the absence of electrodes or when only 3V was applied to the system.

Additional studies demonstrated that electrochemical and geochemical factors (pH, dissolved organic carbon, and ionic composition) do not greatly affect the rate of H₂ production. And, the same electrode material was used for over 6 months in this study without a decrease in the rate of H₂ production. These findings suggest the technology would function in the long term, under a variety of field conditions.

To minimize capital costs for materials and remote power, electrochemical-capping strategy could be applied in combination with a “funnel-and-gate” treatment configuration. In this configuration (also developed by Dr. Reible with SRP funding), the majority of the sediment area is covered by a low-permeability cap, and the contaminants are funneled by hydraulic control to a relatively small area or “gate,” where an electrochemical cap is installed for contaminant degradation.

Significance

The critical advance in this research is the application of low voltage and low current to large area electrodes to enhance and control appropriate microbial activity in a thin horizontal layer within a cap.

Dr. Reible’s results show that simple carbon electrodes can be used to engineer a redox gradient in a sediment cap, produce microbial electron donors, and stimulate contaminant degradation. Electrode-based capping with biobarriers may provide a novel and effective mechanism to remediate contaminants (e.g., PCBs, TCE, and mixtures) that require sequential reduction and oxidation, which may not develop under natural conditions.

For more information, contact:

Danny Reible Ph. D.

Environmental and Water Resources Engineering
Department of Civil, Architectural and Environmental Engineering
University of Texas-Austin
Austin, TX 78712
Phone: (512) 471-4642
Email: reible@mail.utexas.edu

To learn more about this research, please refer to the following sources:

Sun, Mei, Yan, F., Zhang, R., Reible, D., Lowry, G., and Gregory, K. 2010. Redox Control and Hydrogen Production in Sediment Caps Using Carbon Cloth Electrodes. *Environmental Science & Technology*. 44(21):8209-8215.
Available online: doi:10.1021/es101003j



U.S. DEPARTMENT OF HEALTH AND HUMAN SERVICES
National Institutes of Health

